




A division of Worldwide Enterprises



## MOORING CHAIN

**Secure-Moor** and domestic Hot Galvanized, Grade 43, Long Link



Nominal Size		Inside Dimensions (max.)				Working Load Limit		Weight per 100 ft.	
in.	mm.	Length		Width		kg.	lbs.	kg.	lbs.
		in.	mm.	in.	mm.				
3/8"	10.0	1.63	41.5	0.66	16.8	1,837	4,050	66.2	146
1/2"	13.0	2.02	51.3	0.88	22.4	3,129	6,900	115.7	255
5/8"	16.0	2.55	64.8	.94	23.9	4,422	9,750	171.4	378
3/4"	20.0	2.99	76.0	1.05	26.7	5,261	11,600	239.5	528



Many larger bottom chain sizes available

## ANCHORS

***Sizes from 25-2000 pounds***

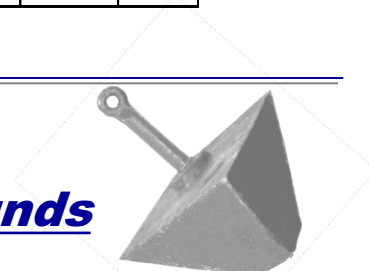

**MUSHROOM ANCHORS**

**PYRAMID ANCHORS**

## HARDWARE

Available in **Secure-Moor** or domestic Chicago Hardware

**GALVANIZED SCREW PIN ANCHOR SHACKLES**



**GALVANIZED FORGED SWIVELS**



Forged Heat Treated with Alloy Pins..Federal Spec RR-C-271D.

## **MOORING BUOYS**

Shackle nest  
3" Thru-Tube design.  
Rotationally molded 1/4" polyethylene,  
closed cell poly fill. 18", 24" and more.  
Built to last!



## **BUOYS**

### **SPAR BUOYS**

Nuns, Cans, Float Collar  
Private aid, Regulatory  
Channel Markers, Winter Sticks  
Red, Green, White, Yellow  
Standard or custom graphics  
Lanterns

